

MIPOLAM® AMBIANCE ULTRA




42*30mm


2062 Beach



2060 Sahara



2054 Cloud



2070 Ink Blue


MIPOLAM® 180



2005



2015

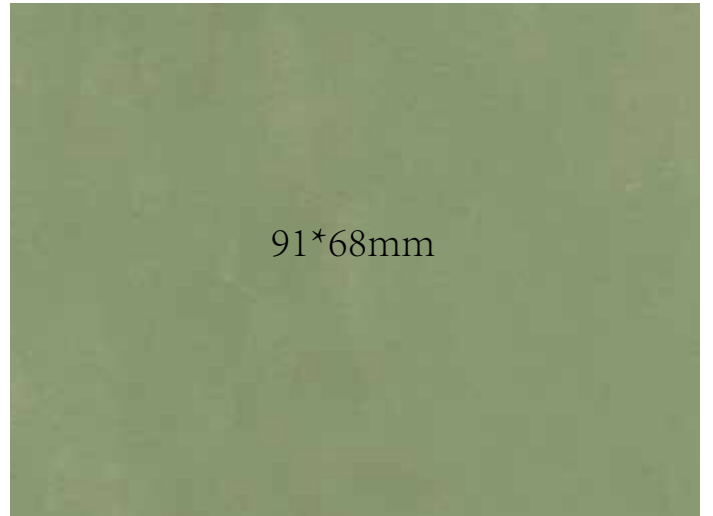

91*68mm

2031



2007



2010


MIPOLAM® CONCEPT



5031 Mocca Foam



5041 White Sky




5025 Lagoon



5030 Toffee



5035 Springfield



5024 Blue Lake

MIPOLAM® ROBUST EL7

MURAL PLUS



0003 Ivory



0112 Storm



3001



3005

MIPOLAM® AMBIANCE ULTRA	MIPOLAM® 180	MIPOLAM® CONCEPT	MIPOLAM® ROBUST EL7	MURAL PLUS
-------------------------------	-----------------	---------------------	---------------------------	---------------

DESCRIPTION

Parameter	ISO 24346 [EN 428]	mm	2	2 / 2.5 *	2	2	1
Total thickness	ISO 24346 [EN 428]	mm	2	2 / 2.5 *	2	2	1
Weight	ISO 23997 [EN 430]	g/m ²	2750	3150 / 3950	2980	3300	1750
Width of sheet	ISO 24341 [EN 426]	cm	200	200	200	200	200
Length of sheet	ISO 24341 [EN 426]	lm	20	20	20	20	30

CLASSIFICATION

Norm / Product specification	-	-	ISO 10581 [EN 649]	ISO 10581 [EN 649]	ISO 10581 [EN 649]	ISO 10581 [EN 649]	-
European classification	ISO 10874 [EN 685]	class	34 - 43	34 - 43	34 - 43	34 - 43	-
Fire rating	EN 13 501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	-
Static electrical propensity	EN 1815	KV	<2	<2	<2	<2	-
	IEC 61340-4-5	V	-	-	-	<100	-
Electrical resistance	EN 1081	Ω	10 ⁹ -10 ¹⁰	10 ⁹ -10 ¹⁰	10 ⁹ -10 ¹⁰	10 ⁴ < R _t <= 10 ⁸	-
Slip resistance dry	EN 13893	-	≥0.3	≥0.3	≥0.3	≥0.3	-
Slip resistance wet	DIN 51130	class	R9	R9	R9	R9	-

PERFORMANCES

Parameter	ISO 10581	type	I	II	I	II	-
Type binder content	ISO 10581	type	I	II	I	II	-
Dimensional stability	ISO 23999 [EN 434]	%	≤ 0.4	≤ 0.4	≤ 0.4	≤ 0.4	≤ 0.40
Residual indentation	ISO 24343-1 [EN 433]	mm	-	-	-	-	≤0.10
Castor chair test	ISO 4918 [EN 425]	-	OK	OK	OK	-	-
Thermal conductivity	ISO 10456 [EN 12524]	W/(m.K)	0.25	0.25	0.25	0.25	-
Colour fastness	ISO 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Chemical products resistance	ISO 26987 [EN 423]	-	OK	OK	OK	OK	OK
Surface treatment	-	-	Evercare™	Easycare™	Easycare™	-	PUR Protect
Anti-bacterial activity (E. coli - S. aureus [1])	ISO 22196	-	>99% Inhibits growth	>99% Inhibits growth	>99% Inhibits growth	>99% Inhibits growth	-
Antiviral activity (human coronavirus 229E)	ISO 21702	-	99.7% after 2h	-	-	-	-
Color number	-	-	50	30	25	10	8

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000 - 6	µg/m ³	< 10	< 10	< 10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®	Floorscore®

CE MARKING CE标志

CE	EN 14041	-		-
----	----------	---	--	---

(1) The implementation of an effective cleaning regime is the most important defence against infections.

Gerflor. Don't forget our complementary ranges!



WE CARE | WE ACT. Our Commitments for a Sustainable future



CARBON FOOTPRINT*
-20 % kg CO₂ equivalent/m² between 2020 and 2025



BIOSOURCED CONTENT***
10 % by 2025



RECYCLED CONTENT
30 % by 2025



ADHESIVE FREE**
35 % by 2025



ANNUAL VOLUME RECYCLED
60 000 t by 2025

* Scopes 1 and 2 defined in the GHG protocol *** % of activity with biosourced materials ** % of activity - adhesive free solution

Be connected!



www.gerflor.com

#Gerflor

Gerflor®
theflooringroup

GERFLOR ASIA Tel.: + 86-21-63578818