


GEM 45 / 60

SPORT & LEISURE APPLICATION



Blue - 9908

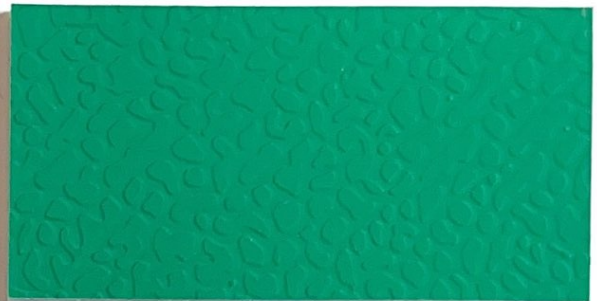

Green - 9906




Orange - 9903



Red - 9909



Grey - 9905

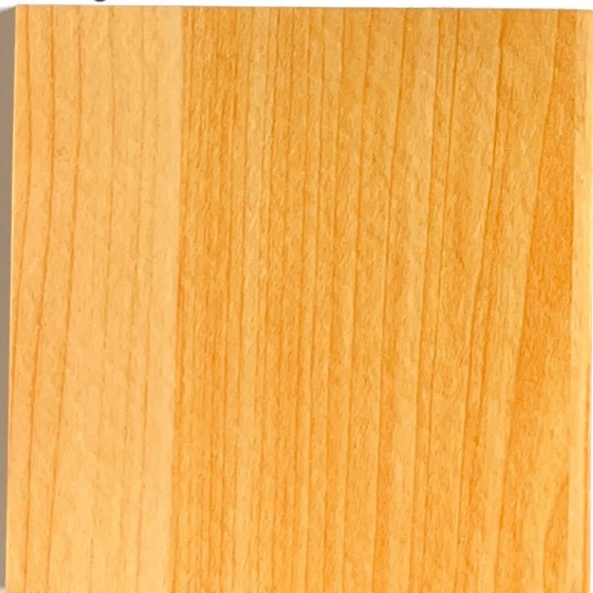

Maple - 9901

GEM 45: W1,8m*L15m*T4.5mm



Oak - 9902

GEM 60: W1,8m*L15m*T6.0mm

GEM 45 / 60









PRODUCT CHARACTERISTICS				GEM 45	GEM 60
	STANDARD	REQUIREMENT	UNIT	RESULTS	RESULTS

PRODUCT CHARACTERISTICS					
Surface treatment	-	-	-	PUR	PUR
Surface complex	-	-	-	Filled PVC wearlayer	Filled PVC wearlayer
Foam	-	-	-	Open Cell Foam	Open Cell Foam
Thickness	EN ISO 24346	-	mm	4.5	6.0
Weight	EN ISO 23997	-	kg/m ²	Genstone Color : ~2.6 Wood Color : ~3.0	Genstone Color : ~3.5 Wood Color : ~3.8
Length	EN ISO 23341	-	lm	15	15
Width	EN ISO 23341	-	lm	1,8	1,8

TECHNICAL CHARACTERISTICS					
Vertical deformation	EN 14809	≤ 3.5	mm	≤ 3.5	≤ 3.5
Sliding coefficient	EN 13036-4	80 to 110	-	80 to 110	80 to 110
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 1000	≤ 1000
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5	≤ 0.5
Shock Absorption	EN 14808	-	%	30	30
Ball bounce	EN 12235	≥90	%	≥90	≥90

CLASSIFICATION					
Fire	EN 13501-1	-	-	C _{fl} -S1	C _{fl} -S1

* The implementation of an effective cleaning method is the best defence against infection

 RECYCLED CONTENT	 COMPOSITION	 WELLNESS	 INSTALLATION	 INDOOR AIR QUALITY	 RECYCLABILITY
--	--	---	---	--	--

Be connected!



IBTFLOOR
IBTFLOOR